


2100 AWNING WINDOW



PRODUCT FEATURES

- High-performance polyamide thermal break
- Full rain screen system to allow water going out
- Durable EPDM seal gaskets on exterior and interior
- Concealed hinges, crank operator, claw handles
- Multiple-point lock for large opening
- Flat insert screen to the frames
- 85.8mm (3 3/8") sight line
- 82.3mm (3 1/4") frame deep
- Setting for either double glazing and triple glazing
- Standard finish in clear anodized and black anodized, options to different colors on exterior and interior
- Can be used individually or integrated in Curtain Wall, Window Wall, and Storefront systems

2100 AWNING WINDOW

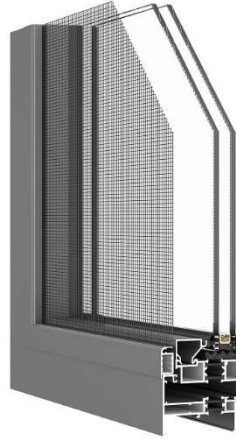


RECOMMENDED SIZE

(Over-sized products may be accommodated due to certain circumstance)


For Double Glazed

(6mm glass/13mm spacer/6mm glass)

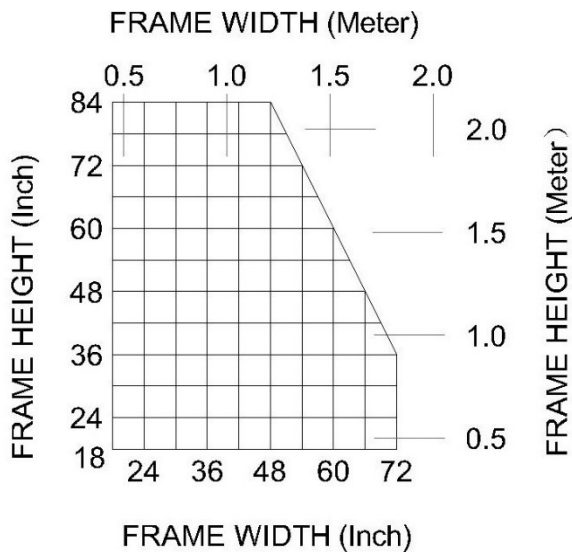

For Triple Glazed

(6mm glass/13mm spacer/6mm glass/13mm spacer/6mm glass)

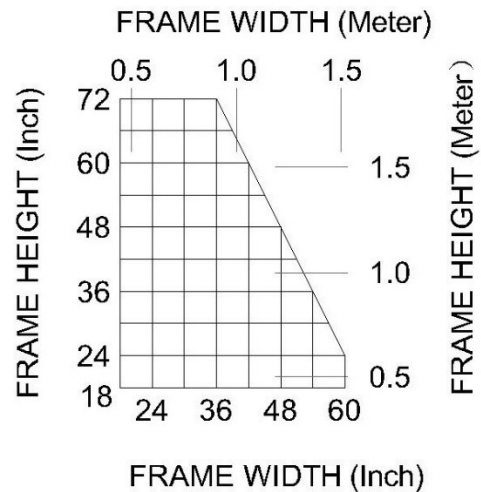

PERFORMANCE

| Product designation | Air Leakage Resistance | Water Penetration Resistance | Uniform Load Deflection | Uniform Load Structural | Forced-entry Resistance | U-factor |
|---------------------|---|------------------------------|-----------------------------------|--|-------------------------|--------------------|
| Class CW-PG70 | 0.08 L/s/m ² (0.016 cfm/ft ²) @ 75 Pa (1.60 psf) | 720 Pa (15.04 psf) | Design: 3600 Pa (75.19 psf) | Design: 3360 Pa (70.2 psf) Maximum: 5040 Pa (105.3 psf) | F10 rating | See U-factor Table |